


Transparent soft PVC hose with hard PVC spiral and Copper Wire.

Suitable for delivery wood and plastic pellets

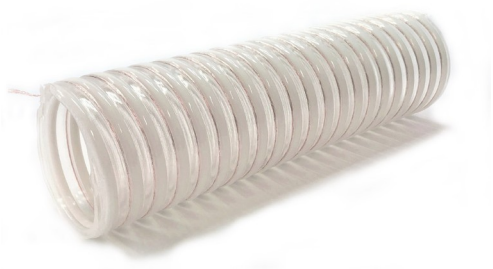

- Flexibility** ● ● ● ●
- Crushing resistance** ● ● ● ●
- Abrasion resistance** ● ● ● ●
- Chemical resistance** Chemical Resistance Chart
- Temperature range** -5°C +60°C

- 
Agriculture
- 
Industry
- 
Home
- 
Building
- 
Food & Beverage

Suitable for contact with food and food liquids Simulant A.B.C and alcoholic liquids up to 20% in compliance with Regulation (EC) No. 1935/2004, Regulation (EC) No. 2023/2006 and Regulation (EU) No. 10/2011 and its successive amendments.



Phthalate FREE. 

Part.no.	ID inch	ID mm	OD mm	Weight g/m	Bend radius mm	Work press bar	Burst press bar	Vacuum mH2O	Coil lenght mt	Pallet mt	Dimension pallet cm
587A0030	1 1/2	38	45,5	500	171	4,5	13,5	7	50	300	80X120
587A0040		40	47,5	540	180	4,5	13,5	7	50	300	80X120
587A0050		50	59,5	790	225	4,5	13,5	7	50	300	80X120
587A0060	2	51	60,5	800	230	4,5	13,5	7	50	300	80X120
587A0070		60	69,5	945	270	4	12	7	50	250	110X130

NOTES:
 ELETRICAL RESISTENCE (OHM/m) = 0,075 ± 5%
 The electrical control of continuity MUST be done after assembling the antistatic hose with sleeves or on final application. This activity is demanded to our customers/finaol users. This control has to be performed constantly during the use of the product
 CHEMICAL RESISTANCE CHART available on TP REFLEX web site.
 TEMPERATURE RANGE based on qualified literature; material datasheet or product tests. WORKING/BURST PRESSURE based on tests performed with water at temperature of 23±2 °C.
 DIMENSIONS AND PERFORMANCES referred to a temperature of 23±2 °C; different temperature as well as handling, storage, aging or application conditions can lead to different values.
 TOLERANCE: from 12 mm to 20 mm: ± 0.3 mm | from 22 mm to 50 mm: ± 0.5 mm | from 51 mm to 100 mm: ± 1.0 mm | from 102 mm to 150 mm: ± 1.5 mm from 152 mm to 200 mm: ± 2.0 mm other values: ±5%
 TIGHTNESS of hose to be tested after assembly of fittings; the test should be performed in safe conditions. TP REFLEX sales department is at disposal to evaluate requests concerning product application.
 TP REFLEX has the right to modify the elements of this catalogue and declines any responsibility for unlike applications/misapplication of its products.